


## REQUEST FOR QUOTATION

Please print this page, provide the necessary information regarding your arch requirements, and fax to (407) 374-2134. We will respond with a detailed quotation at our first opportunity.

**When ordering arches there are 4 critical dimensions to consider:**

- 1. THICKNESS:** This is generally 1" for interior applications. When used to frame transom windows, or on other exterior wall applications, 1½" thickness is recommended to provide added surface for ease of nailing siding.
  - 2. DEPTH:** The depth of the opening covered by the arch.
  - 3. WIDTH:** The width of the opening in which the arch will be placed.
  - 4. RISE:** The height of the arch, as measured straight from a line between the spring points (the lowest points at which the arch contracts the studs) to the highest point on the inside of the arch. (We can also manufacture from the radius of the arch)
- All measurements are *assumed* to be inside dimension measurements. Arches will be supplied at least 6" longer than the ordered width. This allows you to make field adjustments for any variation in the opening. Simply measure the actual opening, then mark and miter cut your arch to fit.
  - Custom-Arch will miter cut arches to your exact width dimensions prior to shipment at a cost of \$5.00/arch. (recommended on difficult to cut half rounds)
  - Any applications that require manufacturing arches to exterior dimensions (such as wrapping floor joist rims) should be clearly communicated.
  - All prices are F.O.B. our Plant. We offer free local delivery.

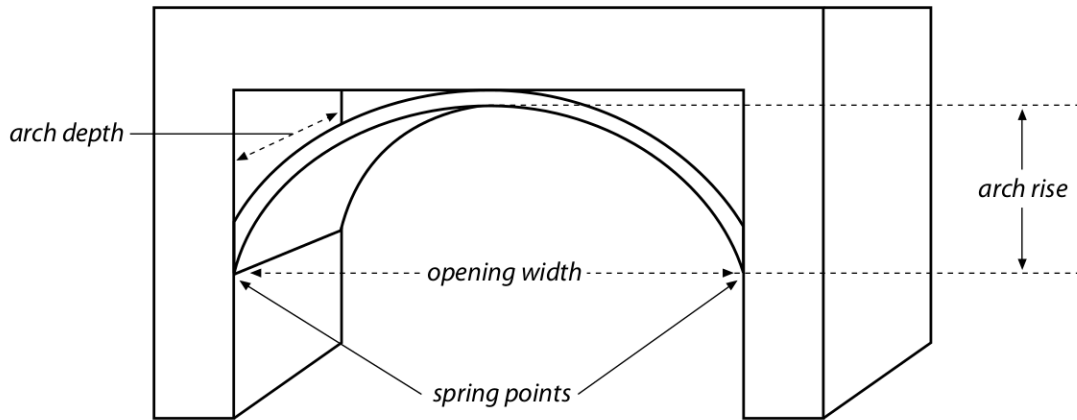

YOUR INFORMATION		ARCH REQUIREMENTS			
		THICKNESS	DEPTH	WIDTH	RISE
Customer	<input type="text"/>				
Contact	<input type="text"/>				
Address	<input type="text"/>				
City	<input type="text"/>	State	<input type="text"/>	Zip	<input type="text"/>
Telephone	<input type="text"/>				
Fax	<input type="text"/>				
Email	<input type="text"/>				